


## Multitone CH78 Handset – Short user guide

**Note:** Charge your handset 14–16 hours prior to first use for best performance.

**Note:** For more information about the handset, refer to user guide available for download

### Handset features

- 1 Headset connector
- 2 Volume Control
- 3 Display
- 4 Left Softkey
- 5 Redirect
- 6 Right Softkey
- 7 On Off Hook
- 8 Microphone
- 9 Four Way Navigation Key

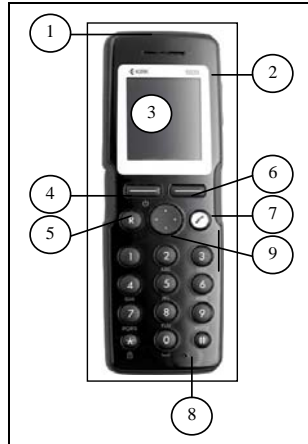

### Basic Handset Options

#### Turning Handset On/Off

- Press left softkey to turn on the handset
- Press left softkey until the question ‘Turn off?’ appears in the display. Confirm **Yes**.

#### Adjusting Speaker Volume

Use the key placed at the upper right side of the handset for volume control.

#### Locking Keypad

- Press **Menu** followed by **\*** to lock/unlock keypad.

### Shortcuts

#### *Predefined Shortcuts*

Predefined shortcuts are unchangeable and assigned to different keys on the handset.

**Call list:** Press left side of the navigation key to enter Call list.

**Exit Menu:** Press **R**.

**Find Name:** Press top or bottom of navigation key.

**Missed Calls:** Press right side of navigation key.

**Redirect:** While off hook, press **R**.

**Save contact:** Dial number and press **Save**.

### Personal Shortcuts

Personal shortcuts consist of functions; you have chosen to add to a list of shortcuts. The list is assigned to the right softkey.

#### To add a shortcut:

- 1 Press **Shortcut**.
- 2 Scroll to **Edit shortcut** and press **Select**.
- 3 Press **Select** to add the function to the list of personal shortcuts.

#### To use a shortcut:

- 1 Press **Shortcut**.
  - 2 Scroll to the desired shortcut and press **Select**.
- Making Calls

#### Dial Directly

- 1 Press to make a call.
- 2 Dial number.
- 3 Press to terminate the call.

#### On Hook Dial (Pre-Dial)

- 1 Dial number.
- 2 Press to make a call.
- 3 Press to terminate the call.

#### Speed Dial

- 1 Press a key (0–9) followed by **\***. You must assign a key to a number in Phone Book.

#### From Call List

- 1 Press left side of navigation key to enter call list.
- 2 Scroll to desired name or number and press.

#### From Phone Book

- 1 Press **Menu** to enter main menu.
- 2 Scroll to **Phone Book** and press **Select**.
- 3 Scroll to **Find name** and press **Select**.
- 4 Find the desired name and press **Select**.
- 5 Press to make a call.

#### Answering Calls

- Press to answer a call when your handset rings.

### Mute a Call

- Press **Silence** and the ring signal is muted.

### Reject a Call

- Press **Reject** to end the call.

### Redirect a Call

1 Press **R** and dial number.

2 Confirm with **Ok**.

To withdraw the call, press **R** again. Note that the feature is system dependent.

### Turning Loudspeaker On/Off

- While on a call, press **Loud on** to turn loudspeaker on.
- Press **Loud off** to turn loudspeaker off.

### Turning Microphone Mute On/Off

- While on a call, press **Mic Mute** to turn microphone mute on.
- Press **Mic on** to turn microphone mute off.

### Changing Settings

#### Adjusting Ringing Volume

- 1 Press **Menu** to enter main menu.
- 2 Scroll to **Settings** and press **Select**.
- 3 Scroll to **Ringing volume** and press **Select**.
- 4 Press left or right key side of navigation key to adjust the volume.
- 5 Press **Set** and then **Back**.

#### Changing Ringing Tone

- 1 Press **Menu** to enter main menu.
- 2 Scroll to **Settings** and press **Select**.
- 3 Scroll to **Ringing tone** and press **Select**.
- 4 Scroll to desired ringing tone and press **Change** to listen to chosen ringer tone.
- 5 Press **Back**.

#### Turning Vibrator On/Off

- 1 Press **Menu** to enter main menu.
- 2 Scroll to **Settings** and press **Select**.
- 3 Scroll to **Vibrator** and press **Select**.
- 4 Scroll to **On** or **Off** and press **Change**.

#### Adding Contact to Phone Book

- 1 Press **Menu** to enter main menu.
- 2 Scroll to **Phone Book** and press **Select**.
- 3 Scroll to **Add name/number** and press **Select**.
- 4 Write name of contact using the digits 2-9.
- 5 Scroll to number and enter the number of the contact (max. 24 digits).
- 6 Press **Save** to store the name and number.

### Technical Information

#### Approvals

Access profile: EN 300444 V1.4.1:2002

EMC: EN 301 489 - 1: Version 1.4.1

EN 301 489 - 6: Version 1.2.1

Radio: EN 301 406 V1.5.1: 2003

Safety: EN 60950 - 1: 2001 + A11 + CORRIG

#### Size and weight

Size: 143 x 48 x 26 mm

Weight: 110 g incl. battery ± 10 g

#### Capacity

Active talking time 15 hours

Stand-by time 150 hours

#### Temperature and air pressure

Operating temperature: 0-40°C

Air pressure: Normal atmosphere condition

#### Approvals

Access profile: EN 300444 V1.4.1:2002

EMC: EN 301 489 - 1: Version 1.4.1

EN 301 489 - 6: Version 1.2.1

Radio: EN 301 406 V1.5.1: 2003

Safety: EN 60950 - 1: 2001 + A11 + CORRIG

#### Temperature and air pressure

Operating temperature: 0-40°C

Air pressure: Normal atmosphere condition

#### International regulatory and product information:

Please find the ED Declaration of Conformity at:

<http://www.kirktelecom.com/compagny/suk273.asp>

The WEEE marking on this equipment indicates that the product must not be disposed of with unsorted waste, but must be collected separately.

#### User guide

The user guide may be downloaded from

<http://www.multitone.co.uk/support-pbx-integration-product-literature.asp>

